

FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

FLEX

Cordless reciprocating saw with pendulum stroke 18.0 V

RSP DW 18.0-EC

Order number 466.964



Cordless reciprocating saw with pendulum stroke 18.0 V

- + Electronic management system (EMS) protects the machine, extends the service life, and increases efficiency
- + Brushless motor with greater efficiency and a longer service life
- + Up to 40% less vibration thanks to double-bearing lifting rod guide for fatigue-free working
- + Accelerator switch for a slow and gentle start
- + Variable speed control
- + Tool-free saw blade change with ejection function allows saw blades to be removed from the quick tool tension contactless.
- + Universal saw blade holder: for an easy saw blade exchange
- + Orbital stroke continuously adjustable from 0-3 mm: switch-activated, especially for fast sawing of timber
- + Saw blade can be turned through 180°
- + Saw support can be adjusted and detached without any tools
- + Dust- and splash-proof lifting rod guide
- + Ergonomically designed, non-slip, soft grip handle
- + Rubberised gear case for a secure grip
- + Integrated LED light
- + FLEX battery system: suitable for all FLEX 18,0 V battery packs. Delivery does not include battery and charger

Technical attributes

Orbit rate, no load	0-3000 opm
Orbit	32 mm
Battery voltage	18 V
Battery capacity	2,5 / 5,0 Ah
Max. material thickness, timber	300 mm
Max. material thickness, metal	20 mm
Size (W x L x H)	450 x 170 x 100 mm
Weight without battery	4,1 kg

Standard equipment

1 carrying case L-BOXX® 238	414.093
1 case insert	468.282

FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

FLEX

Accessories

Rapid charger

Order number 417.882



Technical attributes

QTY/PKG

1

For charging 10.8 and 18.0 V battery packs. With large-format LCD display for battery diagnostics and charge levels. Charging time 10.8 V approx. 40 min. for 2.5 Ah / 4.0 Ah and approx. 55 min. for 6.0 Ah batteries. Charging time 18 V: approx 40 min for 2.5 Ah and approx 45 min for 5.0 Ah. A special procedure charges 80% of the capacity after about 30 min. With integrated battery pack cooler and overheating, discharge, and overload protection.

Li-Ion rechargeable battery pack 18,0 V

Order number 445.886



Technical attributes

Battery capacity

2,5 Ah

Battery voltage

18,0 V

Weight

0,42 kg

QTY/PKG

1

Battery pack Li ion 18.0 V with integrated charge and discharge protection, battery charge indicator, dust and splash protection. Electronic management system (EMS) protects the battery pack, extends the service life, and increases efficiency.

FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

FLEX

Accessories

Li-Ion rechargeable battery pack 18,0 V

Order number 445.894



Technical attributes

Battery capacity	5,0 Ah
Battery voltage	18,0 V
Weight	0,72 kg
QTY/PKG	1

Battery pack Li ion 18.0 V with integrated charge and discharge protection, battery charge indicator, dust and splash protection. Electronic management system (EMS) protects the battery pack, extends the service life, and increases efficiency.

Carrying case L-BOXX®

Order number 414.093



Technical attributes

External dimensions L x W x H	442 x 357 x 253 mm
Internal dimensions L x W x H	378 x 306 x 209 mm
Weight	2,8 kg
QTY/PKG	1

The robust storage and transport system L-BOXX® made of impact-resistant plastic conveys tools, accessories and consumables easily and comfortably to the place of use. Elaborate inserts provide order and clarity, ergonomically shaped handles and additional moulded recesses for flexible and comfortable handling. The unbeatably simple connection and disconnection of the different L-BOXXes optimises combined transportation. Fits the TÜV-tested in-vehicle equipment system from Sortimo perfectly and without adapters. Load capacity per L-BOXX® up to 25 kg, combined transportation up to 40 kg, the cover can be loaded up to 100 kg. Splash-proof. Without insert.

FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

FLEX

Accessories

Reciprocating saw blades for metal and sheet material

Order number 462.055



Technical attributes

Teeth per inch	14
Length in mm	150
QTY/PKG	5

Reciprocating saw blade for 2-8 mm cuts in stainless steel, metal/steel, sheet steel, steel tubing, open/closed sections.

Reciprocating saw blades for metal and sheet material

Order number 462.063




Technical attributes

Teeth per inch	18
Length in mm	150
QTY/PKG	5

Reciprocating saw blade for 1.5-3 mm deep cuts in stainless steel, metal/steel, sheet steel, steel tubing, open/closed sections.

Reciprocating saw blades for metal and sheet material

Order number 462.071




Technical attributes

Teeth per inch	14
Length in mm	230
QTY/PKG	5

Reciprocating saw blade for 2-8 mm cuts in metal/steel, sheet steel, steel tubing, open/closed sections and for 3-180 mm cuts in timber/pallet manufacture.

Reciprocating saw blades for metal, timber, plastic materials

Order number 462.098



Technical attributes

Teeth per inch	6
Length in mm	150
QTY/PKG	5

Reciprocating saw blade for 6-100 mm cuts in MDF, timber containing nails, for building renovation/window frames, metal/steel, glass-fibre reinforced plastics/epoxy, curved cuts.

FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

FLEX

Accessories

Reciprocating saw blades for metal, timber, plastic materials

Order number 462.101



Technical attributes

Teeth per inch	10
Length in mm	150
QTY/PKG	5

Reciprocating saw blade for 3-100 mm cuts in timber containing nails, glass-fibre reinforced plastics/epoxy, and for 3-12 mm cuts in stainless steel, metal/steel, steel tubing.

Reciprocating saw blades for metal, timber, plastic materials

Order number 462.128



Technical attributes

Teeth per inch	10
Length in mm	230
QTY/PKG	5

Reciprocating saw blade for cuts of between 3-190 mm in timber containing nails, pallet manufacture, glass-fibre reinforced plastics/epoxy, and for 3-12 mm cuts in metal/steel, steel tubing.

Reciprocating saw blades for demolition

Order number 462.136



Technical attributes

Teeth per inch	10
Length in mm	230
QTY/PKG	5

Demolition blade for accurate angular cuts up to 180 mm in hardwood, MDF, timber containing nails, for building renovation/window frames, glass-fibre reinforced plastics/epoxy.

FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

FLEX

Accessories

Reciprocating saw blade for insulation material

Order number 462.144



Technical attributes

Length in mm	300
QTY/PKG	2

Reciprocating saw blade for cuts into insulation material, mineral wool, foam, polystyrene (Styrofoam, Styrodur) leather, rubber, paper, carton and carpet.

Battery powered heating jacket



Technical attributes

Size	QTY/PKG	Order number
M	1	417.998
L	1	423.165
XL	1	423.173
XXL	1	423.181

Heated, high-quality soft shell jacket with comfortable fleece lining, various pockets, and detachable hood. Wind and water repellent material for high durability. Three heating zones for individual heating settings and quick heat function. 10,5/21 hours of heat at level 1, 9,5/19 hours at level 2, and 5/10 hours at level 3 (2,5/5,0 Ah 18,0 V). Suitable for 10,8 and 18,0 V lithium ion battery. Battery adapter with USB port for charging smartphones. Battery not included.

Reciprocating saw blades for timber

Order number 462.152



Technical attributes

Teeth per inch	10
Length in mm	230
QTY/PKG	2

Reciprocating saw blade for very clean 6-150 mm cuts in plywood, multiplex/blockboard, MDF, laminated panels.


FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

FLEX

Accessories

Reciprocating saw blade for pallets

Order number 462.160




Technical attributes

Teeth per inch	10
Length in mm	230
QTY/PKG	5

Reciprocating saw blade for 30-100 mm cuts for pallet manufacture.

Reciprocating saw blades assortment for plastic/wood/metal

Order number 462.179

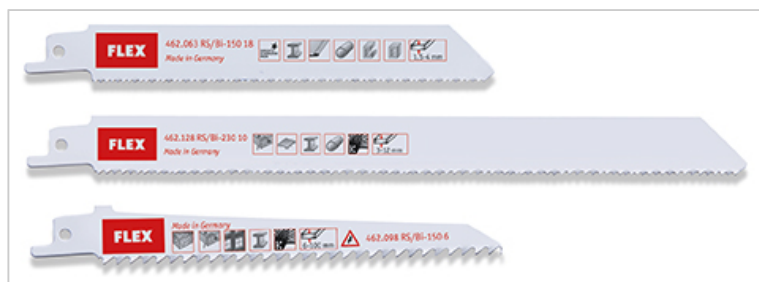


Technical attributes

QTY/PKG	3
---------	---

Set consisting of: 1 reciprocating saw blade for 1.5-3 mm deep cuts in stainless steel, metal/steel, sheet steel, steel tubing, open/closed sections 1 reciprocating saw blade for 6-100 mm cuts in MDF, timber containing nails, for building renovation//window frames, metal/steel, glass-fibre reinforced plastics/epoxy, curved cuts. 1 reciprocating saw blade for 3-190 mm cuts in timber containing nails, pallet manufacture, glass-fibre reinforced plastics/epoxy, and for 3-12 mm cuts in metal/steel, steel tubing.

Case insert

Order number 468.282

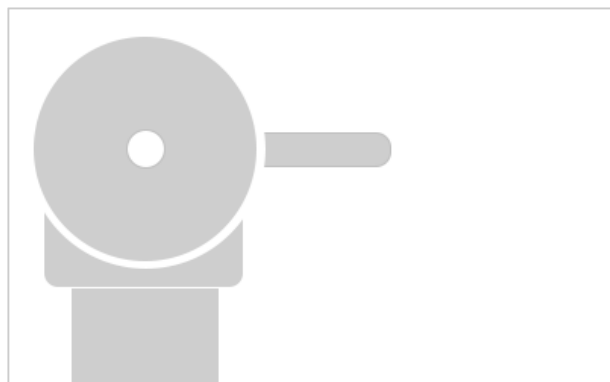

Technical attributes

QTY/PKG	1
---------	---

Matching insert for RSP DW 18.0-EC for carry case L-BOXX® 238.

FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

FLEX

Accessories

LED worklamp

Order number 417.955



Technical attributes

QTY/PKG

1

Powerful LED worklamp with 24 cold-white LEDs and integrated discharge protection. LED head can be swivelled through 320° and folded through 180°. Swivelling and lowerable hook for attaching the lamp and belt clip. Lighting duration: approx 20 hours with 2.5 Ah battery pack and approx 40 hours with 5.0 Ah battery pack. FLEX battery system: suitable for all 18 V battery packs. Delivery does not include battery.

Power 55 R

Order number 491.349



Technical attributes

QTY/PKG

1

Set consisting of a 10.8/18.0 V rapid charger and two 5.0 Ah 18.0 V battery packs.

FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

FLEX

Accessories

Power 22 Q

Order number 491.357



Set consisting of a 18.0 V charger and two 2.5 Ah 18.0 V battery packs.

Technical attributes

QTY/PKG

1